

URBAN **CRAFT** CERAMICA

ELEGANCE WITH EXCELLANCE



Address : Jetparada Road At : Bhojapara, Taluka : Wankaner, Gujarat - 363621 India

Contact : +91 973 788 8804 | info@ubcraftceramica.com

Website : www.ubcraftceramica.com



Troy

A Matt Finished Glazed Porcelain Tile, each meticulously designed to capture the essence of concrete, rustic, stone, or sand surfaces, providing a stylish and durable solution for modern interiors

Look : Stone | Terrazzo

Finish : Matt


Color : 

Size : 12IN x 24IN | 24IN x 24IN |
24IN x 48IN | 32IN x 32IN |
32IN x 64IN | 48IN x 48IN

Urban **Craft** Ceramica



Urban **Craft** Ceramica

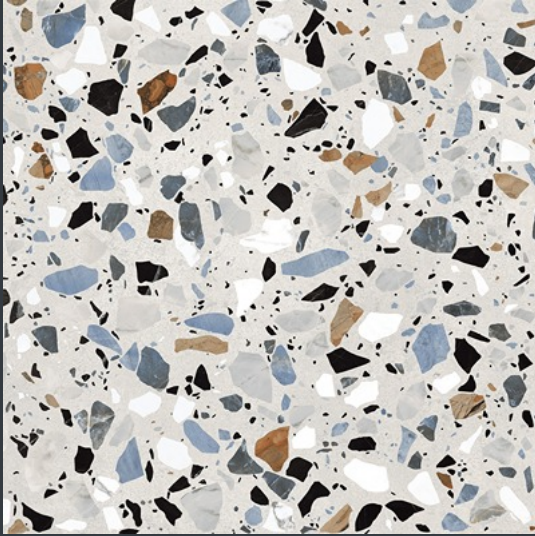

Urban Craft Ceramica

Features



Stain
Resistance



Scratch
Resistance



Chemical
Resistance



Heat
Resistance



Impact
Resistance



Easy
Cleaning



Anti
Bacterial



Floor



Wall

Application



Bathroom



Bedroom



Commercial



Kitchen



Livingroom

Urban Craft Ceramica

TECHNICAL SPECIFICATIONS - GLAZED PORCELAIN - MATT, MATT WITH STRCTURE, ROCKER TILES			
CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411	OUR VALUE	TEST METHOD
REGULATORY PROPERTIES			
Deviation in length & width	± 0.5%	± 0.1%	ISO-10545-2
Deviation in thickness	± 5.0%	± 4.0%	ISO-10545-2
Straightness in sides	± 0.5%	± 0.1%	ISO-10545-2
Rectangularity	± 0.5%	± 0.1%	ISO-10545-2
Surface flatness	± 0.5%	± 0.2%	ISO-10545-2
Surface quality	Min. 95% defect free	> 95%	ISO 10545-2
STRUCTURAL PROPERTIES			
Water absorption	< 0.50%	< 0.05%	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.20 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES			
Modulus of rupture	> 35 N/mm2	> 40 N/mm2	ISO-10545-4
Breaking strength	> 1300 N	> 1800 N	ISO-10545-4
Impact resistance (COR)	>0.55	>0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES			
Surface abrasion resistance	Declared class	Class PEI 4 (2100 revolutions)	EN 154
Surface scratch hardness (Mohs scale)	5	5	EN 101
THERMO HYGROMRTRIC PROPERTIES			
Frost resistance	Test passed in accordance with test method	Pass	ISO-10545-12
Thermal shock resistance	Min. 10 cycle	Pass	ISO-10545-9
Moisture expansion	0.06mm/m	0.01mm/m	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10	Max. 6.5 x 10	ISO-10545-8
Crazing resistance	No damage	No damage	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Min. Class 3	Class 5	ISO-10545-14
SEFETY PROPERTIES			
Slip resistance (COF)	Declared value	> 0.40 dry, > 0.40 wet	ISO-10545-17
Reaction to fire	Class A1 or A1fl	Class A1 - A1fl	N.A.

Thank you

Address : Jetparada Road At : Bhojapara, Taluka : Wankaner, Gujarat - 363621 India

Contact : +91 973 788 8804 | info@ubcraftceramica.com

Website : www.ubcraftceramica.com